

## TSB-隔爆/增安.非铠装

TSB系列隔爆非铠装电缆引入装置(填料函、电缆戈兰)

cable gland




<b>材质</b> <b>Material</b>	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
<b>特点</b> <b>Features</b>	根据最新的IECEX和ATEX标准 According to the latest IECEX and ATEX standards	
	适用于非铠装电缆 Suitable for non armored cable	
<b>防爆标志</b> <b>Ex mark</b>	Ex d/Ex e IIC Gb/ DIP A21 TA	<b>防护等级</b> <b>Degree of protection</b>
		IP68
<b>工作温度</b> <b>COT</b>	-60°C ~100°C	



- 1、密封圈材质: 硅橡胶(-60°C~+80°C)
- 2、用于区1区2、20、21区和22区

- 1, sealing material: silicone rubber (-60 or C~+80 or C)
- 2, 2, 20, 21, 22 and 1 in the area.

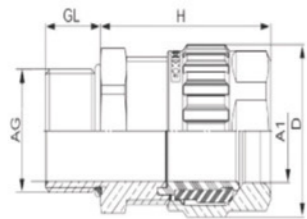

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	外层电缆 B Outher sheath B	最大外径D Max Across Corners D	H
	公制ISO Metric ISO	NPT/G				
TSB-01S	M20 × 1.5	1 / 2	16	6-12	27	36.5
TSB-01	M20 × 1.5	1 / 2	16	9-16	29	41
TSB-02	M20 × 1.5	1/2or3/4	16	12.5-20.5	35	48
TSB-03	M25 × 1.5	3/4or1	16	16.9-26	42	48.5
TSB-04	M32 × 1.5	1or1-1/4	16	22-33	52	54
TSB-05	M40 × 1.5	1-1/4or1-1/2	16	28-41	64	60
TSB-06	M50 × 1.5	2	16	40-52.6	73	67
TSB-07	M63 × 1.5	2-1/2	16	51-65.3	90	72

- 1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
- 2、NPT螺纹长度为有效螺纹长度;

- 1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
- 2, NPT thread length for effective thread length;

## TX-隔爆/增安.铠装

TX系列隔爆铠装电缆引入装置(填料函、电缆戈兰)

cable gland




<b>材质</b> <b>Material</b>	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)	
<b>特点</b> <b>Features</b>	适用于钢丝铠装、钢带铠装、编织带铠装、船用编组及铅护套电缆 Suitable for steel wire armored armored, braid armored, marine marshalling and lead sheathed cable	
<b>防爆标志</b> <b>Ex mark</b>	Ex d IIC Gb/ DIP A20	<b>防护等级</b> <b>Degree of protection</b>
		IP68
<b>工作温度</b> <b>COT</b>	-60°C ~100°C	



- 1、密封圈材质: 硅橡胶
- 2、内部和外部双重密封套的电缆

- 1, sealing ring material: silicone rubber
- 2, internal and external double seal sets of cable

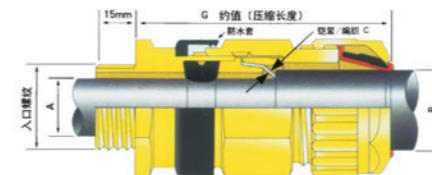

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	内层电缆 A Inner sheath A	外层电缆 B Outher sheath B	最大外径E Max Across Corners E	G
	公制ISO Metric ISO	NPT/G					
TX-01S	M20 × 1.5	1 / 2	15	3.2-7.8	6-12	31	78
TX-01	M20 × 1.5	1 / 2	15	7.6-11.8	9-16	31	78
TX-02	M20 × 1.5	1/2or3/4	15	11-14.2	12.5-20.5	38	78
TX-03	M25 × 1.5	3/4or1	15	13.2-20.1	16.9-26	45	80
TX-04	M32 × 1.5	1or1-1/4	15	19-26	22-33	56	84
TX-05	M40 × 1.5	1-1/4or1-1/2	15	25.2-32.4	28-41	66	100
TX-06	M50 × 1.5	2	15	31.6-44.3	36-52.6	78	114
TX-07	M63 × 1.5	2-1/2	15	42.6-56.2	46-65.3	101	122
TX-08	M75 × 1.5	3	15	54.6-68	57-78	116	128

- 1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片
- 2、NPT螺纹长度为有效螺纹长度;

- 1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece
- 2, NPT thread length for effective thread length;