

BHJ-隔爆/增安.铠装

TBJ-隔爆·公制外螺纹大/内螺纹小

BHJ系列防爆活接头 cable gland 防爆变径接头 reducer union



材质 Material	优质黄铜表面镀镍或不锈钢制成 High quality brass surface nickel plated or stainless steel
特点 Features	外部密封套的电缆 Cable for external sealing sleeve
防爆标志 Ex mark	Ex eIIc 防护等级 Degree of protection IP65
工作温度 COT	-60°C ~100°C




1. 螺纹规格可特制, 如NPT螺纹, 公制螺纹等,
注: 标注螺纹规格时应注明内外螺纹;
2. 螺纹规格可根据用户要求特制;

1. thread specification can be made, such as NPT thread, metric thread, etc.,
Note: the thread specification should indicate the internal and external thread;
2. thread specifications can be customized according to user requirements;



单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG				外层电缆 Outer sheath B
	A	L1	L2	L3	
BHJ□-G1/2"	38	40	55	64	6.5-11
BHJ□-G3/4"	46	40	55	64	10-14
BHJ□-G1"	50	46	64	74	12-19
BHJ□-G1 1/4"	65	46	64	74	15-25
BHJ□-G1 1/2"	75	46	64	74	18-33
BHJ□-G2"	85	52	73	84	26-43
BHJ□-G2 1/2"	110	52	73	84	30-50
BHJ□-G3"	115	57	81	94	38-57
BHJ□-G4"	145	57	81	94	48-80


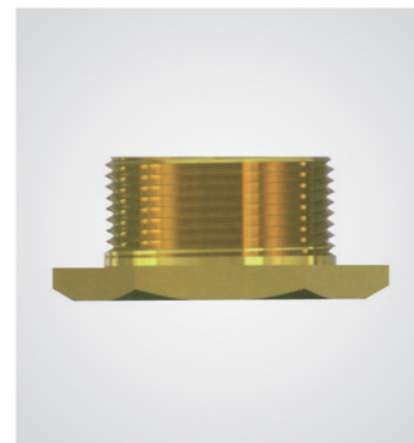


材质 Material	黄铜、黄铜镀镍或不锈钢 (订货时请指明) Brass, brass nickel plated or stainless steel (When ordering, please specify)
特点 Features	适用于螺纹转换或需变径的场所 Suitable for thread conversion or reducing place
防爆标志 Ex mark	ExdIIc Gb
工作温度 COT	-60°C ~100°C



1、可选附件: 锁紧螺母、O型圈、平垫圈、锯齿圈、接地片

1、Optional accessories: reducer union ;lockion nut,O Ring,flat washer,serrated washers,sheath,grounding

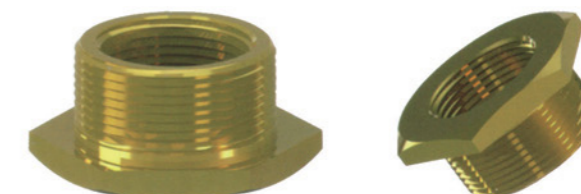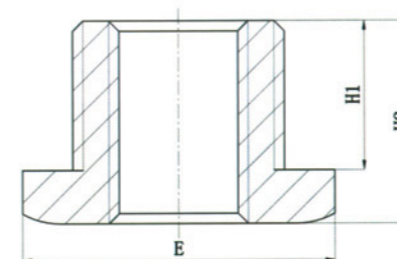

订购示例 (eg) : TBJ-M32 × 1.5/M25 × 1.5

单位:mm

规格型号 Gland size	外螺纹 external thread	内螺纹 internal thread	H1	H2	E
TBJ-M16 × 1.5/M12 × 1.5	M16 × 1.5	M12 × 1.5	15	19	26
TBJ-M20 × 1.5/M16 × 1.5	M20 × 1.5	M16 × 1.5	15	19	30
TBJ-M25 × 1.5/M20 × 1.5	M25 × 1.5	M20 × 1.5	15	20	35
TBJ-M32 × 1.5/M20 × 1.5	M32 × 1.5	M20 × 1.5	15	20	44
TBJ-M32 × 1.5/M25 × 1.5	M32 × 1.5	M25 × 1.5	15	20	44
TBJ-M40 × 1.5/M25 × 1.5	M40 × 1.5	M25 × 1.5	15	20	58
TBJ-M40 × 1.5/M32 × 1.5	M40 × 1.5	M32 × 1.5	15	20	58
TBJ-M50 × 1.5/M32 × 1.5	M50 × 1.5	M32 × 1.5	15	20	69
TBJ-M50 × 1.5/M40 × 1.5	M50 × 1.5	M40 × 1.5	15	20	69
TBJ-M63 × 1.5/M40 × 1.5	M63 × 1.5	M40 × 1.5	15	21	81
TBJ-M63 × 1.5/M50 × 1.5	M63 × 1.5	M50 × 1.5	15	21	81
TBJ-M75 × 1.5/M50 × 1.5	M75 × 1.5	M50 × 1.5	15	21	98